

# L20 Peristaltic Pump

www.enviroflexpumps.com | +44 (0) 1332 913 200 | sales@enviroflexpumps.com




## PUMP SPECIFICATIONS

- PUMP (HOSE) BORE**  
20mm (3/4")
- MAX WORKING PRESSURE**  
10 BarG (145 PSI)
- DISPLACEMENT PER REV**  
0.23 L/REV (0.061 US GAL/REV)
- MAX CONTINUOUS SPEED**  
90 RPM
- MAX INTERMITTENT SPEED**  
100 RPM
- SOLIDS HANDLING**  
Soft: 16mm (5/8") Hard: 3mm (1/8")
- MAX SUCTION LIFT (WATER)**  
9 Meters (27 Feet)
- AVERAGE STANDARD WEIGHT**  
65 KG (143 LB)



## L20 PERFORMANCE CURVE

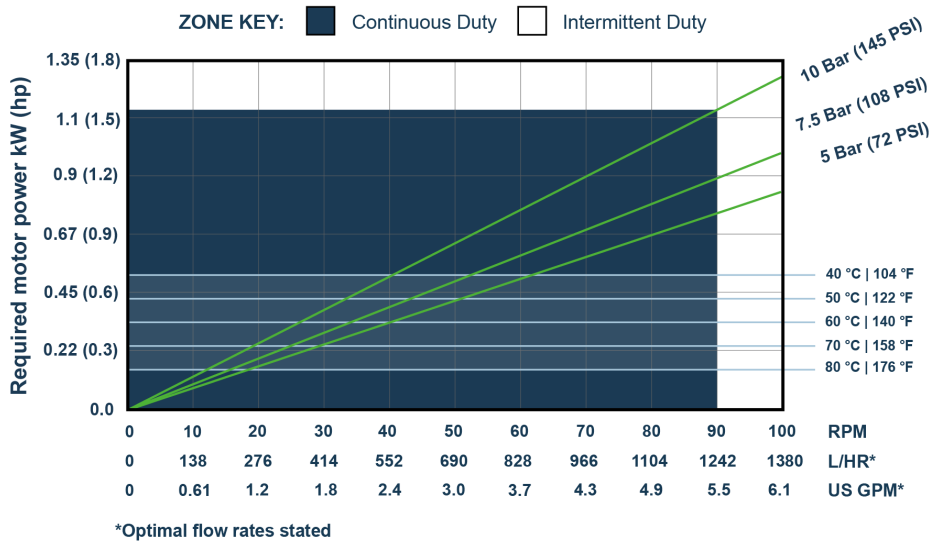

## RUBBER HOSE MATERIALS

- Natural (NR)
- Food Grade Natural (FGNR)
- Nitrile Buna (NBR)
- Food Grade Nitrile Buna (FGNBR)
- Ethylene Propylene Diene Monomer (EDPM)
- Chlorosulfonated Polyethylene (CSM)
- Fluorine/Fluoro (FKM)

## CONNECTION OPTIONS

- BSPT (standard)
- Tri-Clamp\*
- ANSI Class 150
- IDF
- Flanged
- RJT
- PN16 Flanged
- Camlock

## GA DRAWING

